



Designed as a first section of tandem pumps group 21A(C)...X573.../...

Rotation "A"

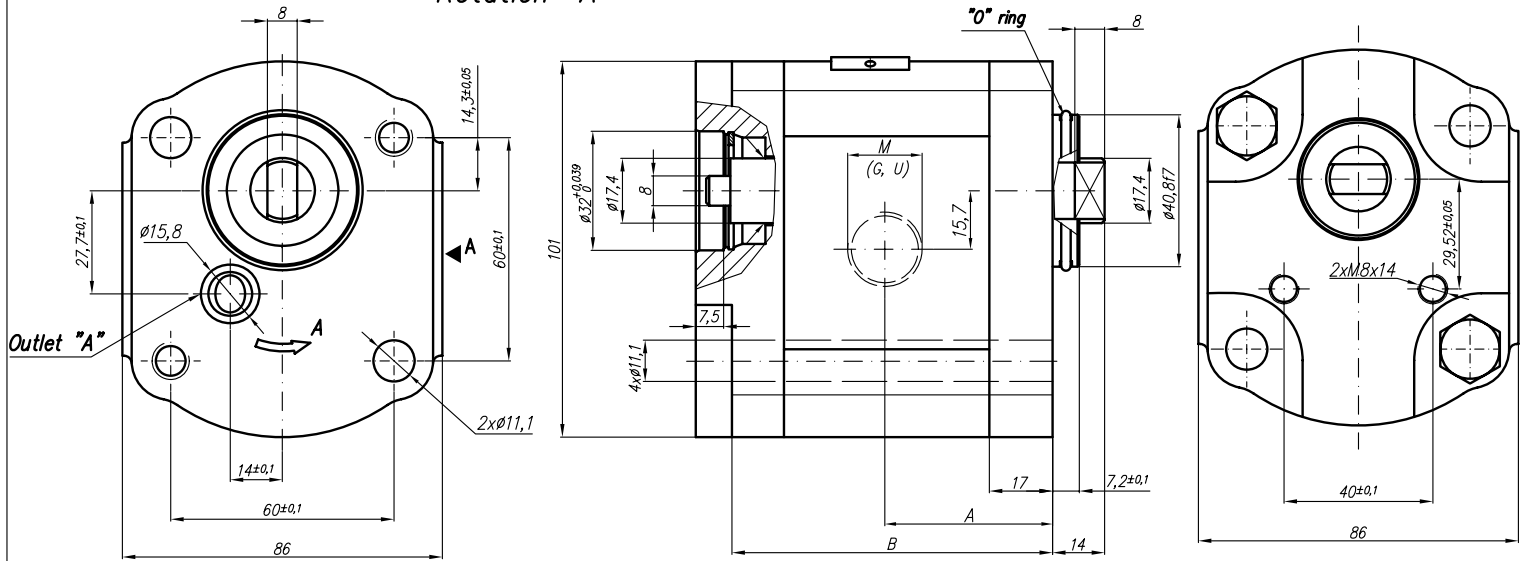

Rotation "C"

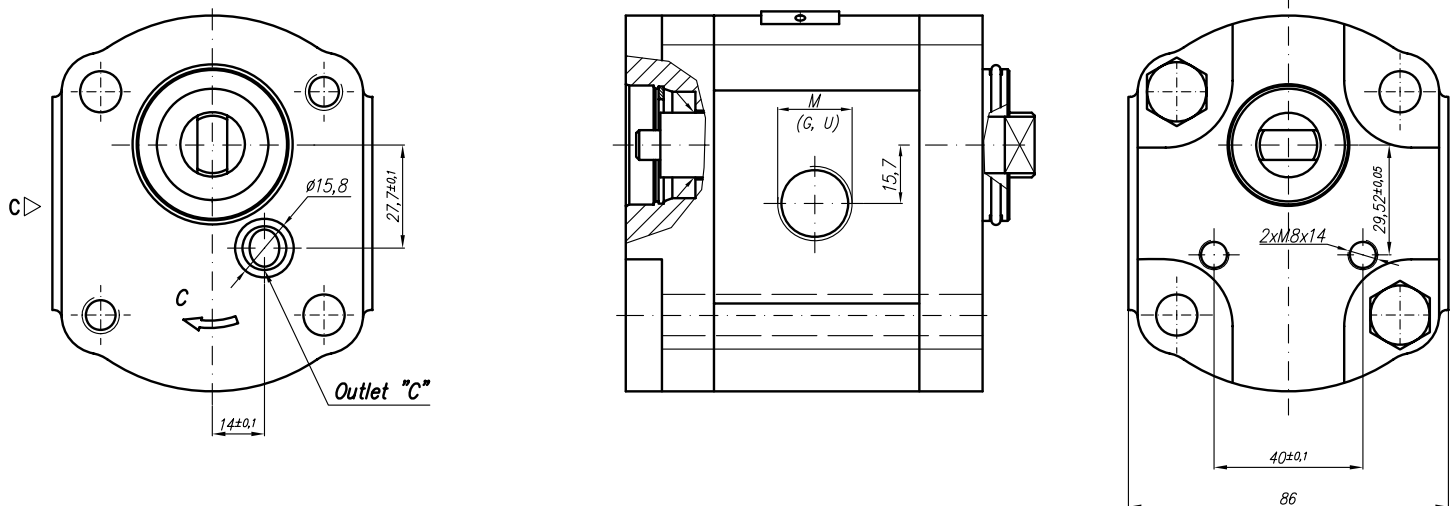

Type	Displacement cm ³ /rev	Flow		Pressure P _{nom} bar	max Speed n rpm	Dimension								
		at 1500 rpm l/min	at max rpm l/min			A mm	B mm	Inlet			Outlet			
						M	G	U	M	G	U			
20A(C)4,5X573...	4,5	6,14	14,33	250	3500	39,8	87,7							
20A(C)6,3X573...	6,3	8,69	20,29	250	3500	41	90,7		G1/2					
20A(C)8,2X573...	8,2	11,32	26,40	250	3500	43,1	93,6							
20A(C)10X573...	10	13,95	32,55	250	3500	47,5	95,6							
20A(C)11X573...	11,3	15,76	36,78	250	3500	47,5	98,7							
20A(C)12X573...	12	16,92	39,48	250	3500	47,5	100							
20A(C)14X573...	14	19,95	46,55	250	3500	47,5	103,1							
20A(C)15X573...	15	21,60	36,00	250	2500	47,5	104,6							
20A(C)16X573...	16	23,04	38,40	250	2500	47,5	106,2							
20A(C)19X573...	19	27,36	45,60	200	2500	47,5	112,2							
20A(C)22X573...	22	31,68	42,24	180	2000	55	116,2							
20A(C)25X573...	25	36,00	48,00	160	2000	57,2	121,1							