
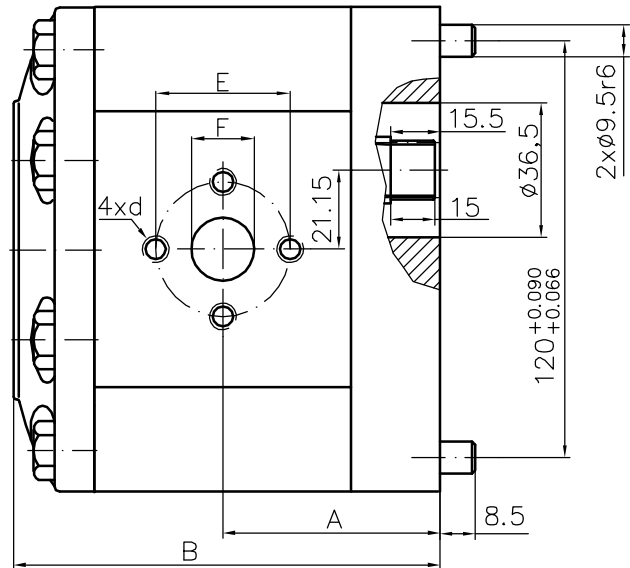


Designed as a second section of multiple gear pumps group 33.

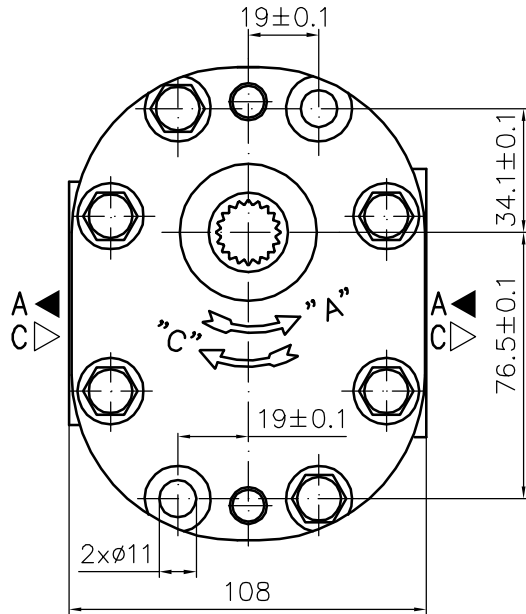

Type	Displacement cm <sup>3</sup> /rev	Flow		Pressure P <sub>nom</sub> bar	max Speed n rpm	Dimension								
		at 1500 rpm l/min	at max rpm l/min			A mm	B mm	Inlet			Outlet			
								E	d	F	E	d	F	
30A(C)20X240H	20	28,2	56,4	200	3000	58,3	118,9	40	M8	19	40	M8	19	
30A(C)22,2X240H	22,5	31,7	63,5	200	3000	59,7	121,9							
30A(C)25X240H	25	35,3	70,5	200	3000	60,5	123,3							
30A(C)28X240H	28	39,5	79,0	200	3000	62,4	126,9							
30A(C)32X240	32	45,1	75,2	200	2500	64,2	130,5							
30A(C)32X240H	32	45,1	90,2	200	3000	68,7	139,5	51	M10	27	40	M8	19	
30A(C)36X240	36	50,8	84,6	190	2500	65,7	133,6							
30A(C)36X240H	36	51,3	95,8	190	2800	70,2	142,7							
30A(C)42X240	42	59,9	91,8	190	2300	68,5	139,2							
30A(C)42X240H	42	59,9	99,8	190	2500	73,0	148,3							
30A(C)46X240H	46	65,6	100,5	175	2300	74,9	152,0	51	M10	27	40	M8	19	
30A(C)50X240H	50	71,3	99,8	175	2100	76,7	155,6							
30A(C)55X240H	55	78,4	91,4	175	1750	78,9	160,1							
30A(C)60X240H	60	85,5	99,8	160	1750	80,9	164,6							