


Designed as a first section of multiple gear pumps group 33.

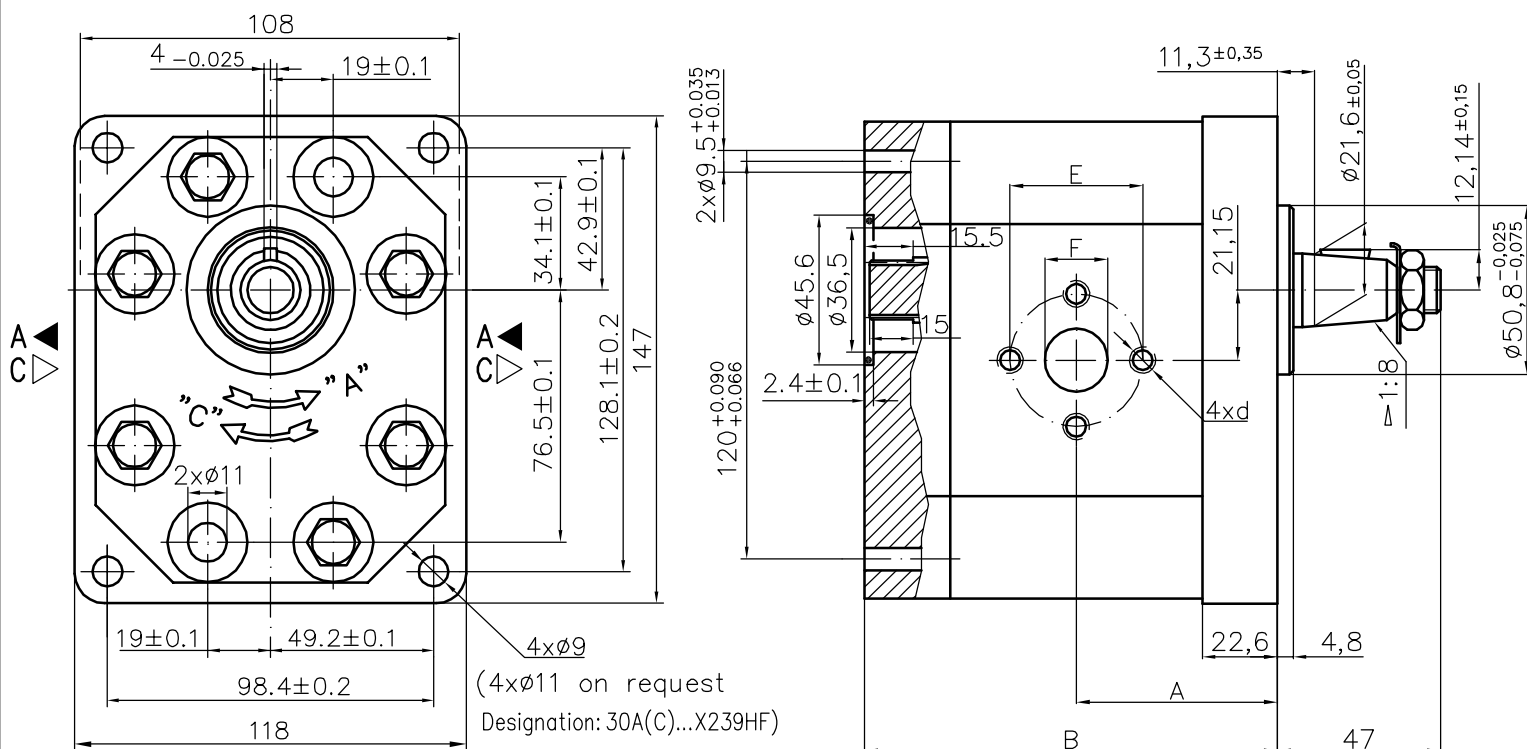

Type	Displacement cm <sup>3</sup> /rev	Flow		Pressure P <sub>nom</sub> bar	max Speed n rpm	Dimension								
		at 1500 rpm l/min	at max rpm l/min			A mm	B mm	Inlet			Outlet			
								E	d	F	E	d	F	
30A(C)20X239H	20	28,2	56,4	200	3000	56,1	114,7	40	M8	19	40	M8	19	
30A(C)22,2X239H	22,5	31,7	63,5	200	3000	57,6	117,7							
30A(C)25X239H	25	35,3	70,5	200	3000	58,3	119,1							
30A(C)28X239H	28	39,5	79,0	200	3000	60,2	122,7							
30A(C)32X239	32	45,1	75,2	200	2500	62,0	126,3							
30A(C)32X239H	32	45,1	90,2	200	3000	66,5	135,3	51	M10	27	40	M8	19	
30A(C)36X239	36	50,8	84,6	190	2500	63,5	129,4							
30A(C)36X239H	36	51,3	95,8	190	2800	68,0	138,5							
30A(C)42X239	42	59,9	91,8	190	2300	66,3	135,0							
30A(C)42X239H	42	59,9	99,8	190	2500	70,8	144,0							
30A(C)46X239H	46	65,6	100,5	175	2300	72,7	147,8	51	M10	27	40	M8	19	
30A(C)50X239H	50	71,3	99,8	175	2100	74,5	151,4							
30A(C)55X239H	55	78,4	91,4	175	1750	76,7	155,9							
30A(C)60X239H	60	85,5	99,8	160	1750	78,7	160,4							